


## RXFB-4/4B 薄型铝外壳线绕电阻器 40W-150W

RXFB-4/4B thin Aluminum Housing Wire Wound Resistors 40W-150W

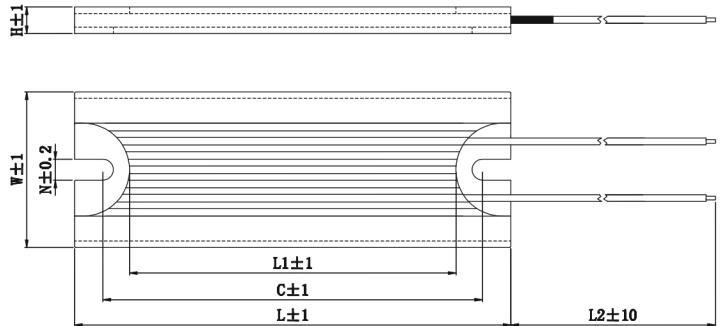

### 产品特点 Features

- 高温负荷特性优良  
Excellent high temperature load performance
- 高过载能力  
High over loading ability
- 符合欧盟 ROHS 标准  
ROHS compliant
- 外形美观、易于安装  
Attractive appearance and easy installation

### 应用范围 Applications

- 电力分配, 负荷测试  
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域  
Ideal for functional power supply / Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分  
Applied to the soft starting and braking parts of industrial controlled servo drive system

### 主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)						
				L	W	H	C	N	L2	L1
RXFB-4	40	1R ~ 1KR	±5% (J) ±10% (K)	61	26	7	55	3.5	可定制	47
	60	1R ~ 1KR		72.5	27.5	11	65	3.5		59.5
	100	1R ~ 1KR		100	27.5	11	86.5	3.5		80
RXFB-4B	60	1R ~ 1KR		115	41	7	100	4.5		86
	80	1R ~ 1KR		140			125	4.5		111
	100	1R ~ 1KR		165			150	4.5		140
	120	1R ~ 1KR		190			175	4.5		165
	150	1R ~ 1KR		215			200	4.5		190

### 订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXFB-4	100W	50R	±5%