

RXLG-A / B 型铝外壳线绕电阻器 60W-200W

RXLG-A / B 型铝外壳线绕电阻器 60W-200W

RXLG-A / B Aluminum Housing Wire Wound Resistors 60W-200W

RXLG-A / B Aluminum Housing Wire Wound Resistors 60W-200W


产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 高过载能力
High over loading ability
- 符合欧盟 ROHS 标准
ROHS compliant
- 外形美观、易于安装
Attractive appearance and easy installation

应用范围 Applications


- 电力分配, 负荷测试
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域
Ideal for functional power supply / Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分
Applied to the soft starting and braking parts of industrial controlled servo drive system

降功耗曲线 Derating curve

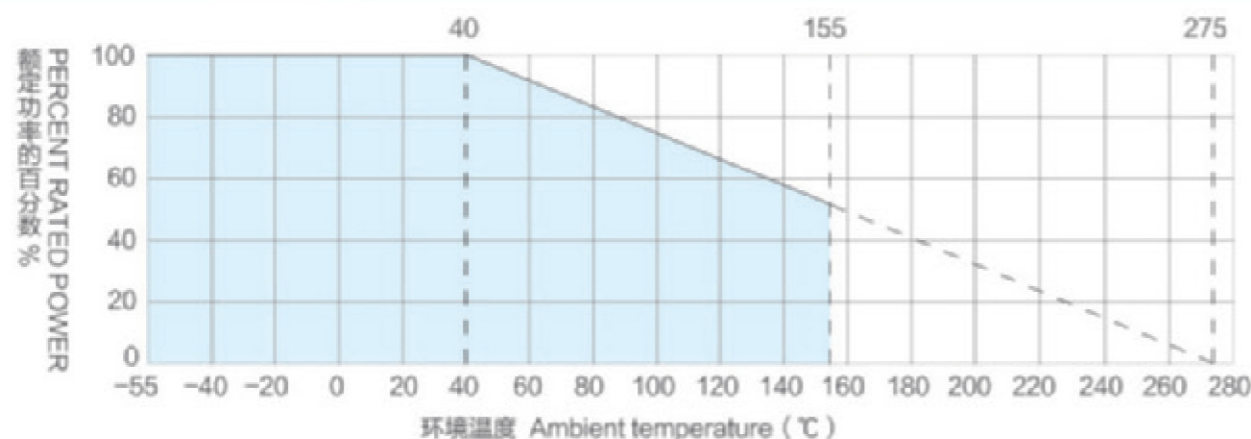

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXLG-A	100W	50R	±5%

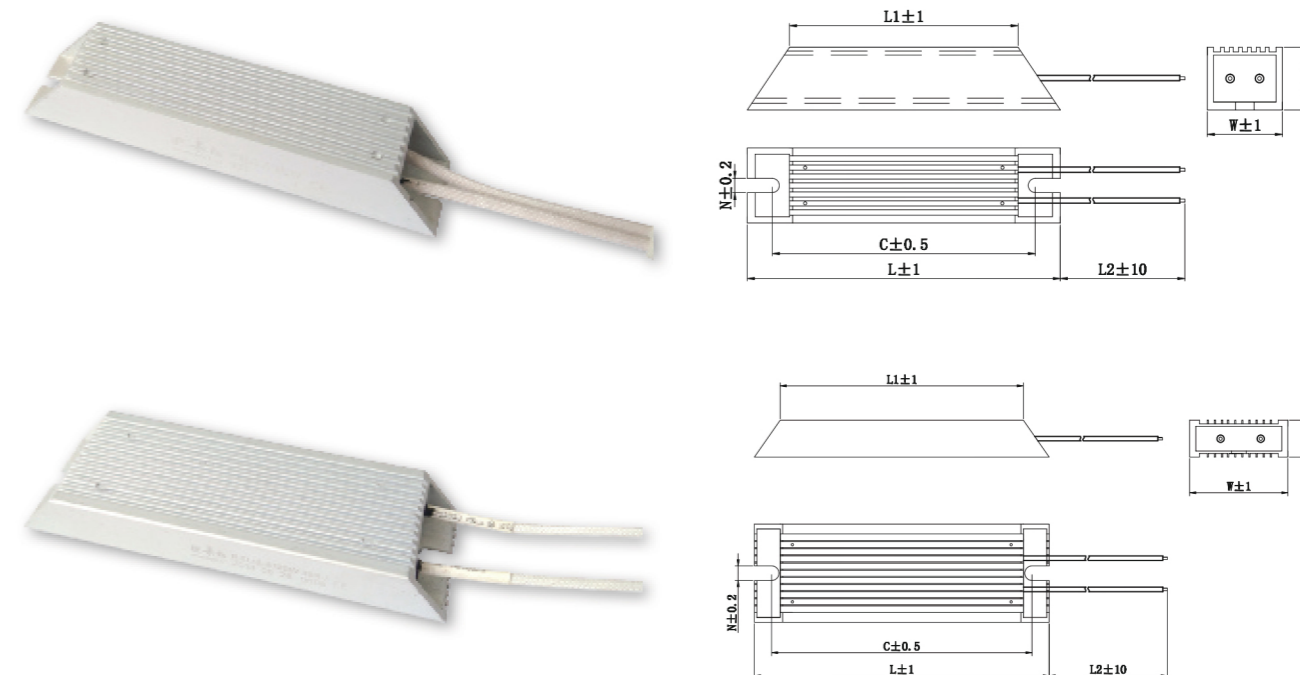

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)						
				L	L1	W	H	C	N	L2
RXLG-A	60	1R ~ 2KR	±5% (J) ±10% (K)	100	70	25	20	84	5.6	可定制
	80	1R ~ 2KR		120	90	25	20	104	5.6	
	100	1R ~ 2KR		120	90	30	20	104	5.6	
	150	1R ~ 2KR		148	118	30	20	131	5.6	
RXLG-B	60	1R ~ 1KR		90	68	40	15	76	5.6	
	100	1R ~ 1KR		120	95	40	15	106	5.6	
	200	1R ~ 1KR		170	147	40	15	153	5.6	